

SKOBIFIX[®]nano 30

Prefab chimney shaft (Outer dimension: 130x160 mm) for condensing technology, defined for buildings class 1–2 (Single family dwellings, fire-resistance class F30)

Order/enquiry form 2021

Description and brief explanation:

The overview diagram (Right) shows the assembled structure of the SKOBIFIX[®]nano 30 prefab shaft. The shaft comprises the following parts:

- 1 1M interlocking chimney shaft block, containing integral PPs flue D60 including bracing brackets
- 2 Ceiling connection adapter with 100mm air-inlet inspection cap 60/100
- 3 Stack pack, comprising roof terminal, with options of pitched roof tile 25–45°, 5–25°, 35–55° or flat flashing
- 4 SKOBIFIX special adhesive in 3 kg tub
- 5 Support brackets

The interlocking shaft blocks **1** are 1 metre in length. The quantity of shaft parts required is determined by the length of the shaft starting at the ceiling above the heating appliance and extending to the roofing panel (around the shaft length up to the next whole number).

One ceiling connection adapter **2** and one stack pack **3** is required for each chimney shaft. Appropriate option should be selected or flat roof, or pitch of roof, height above roof and colour required.

A 3 kg tub of special adhesive **4** is sufficient to secure approx. 10 off interlocking chimney shaft block joints.

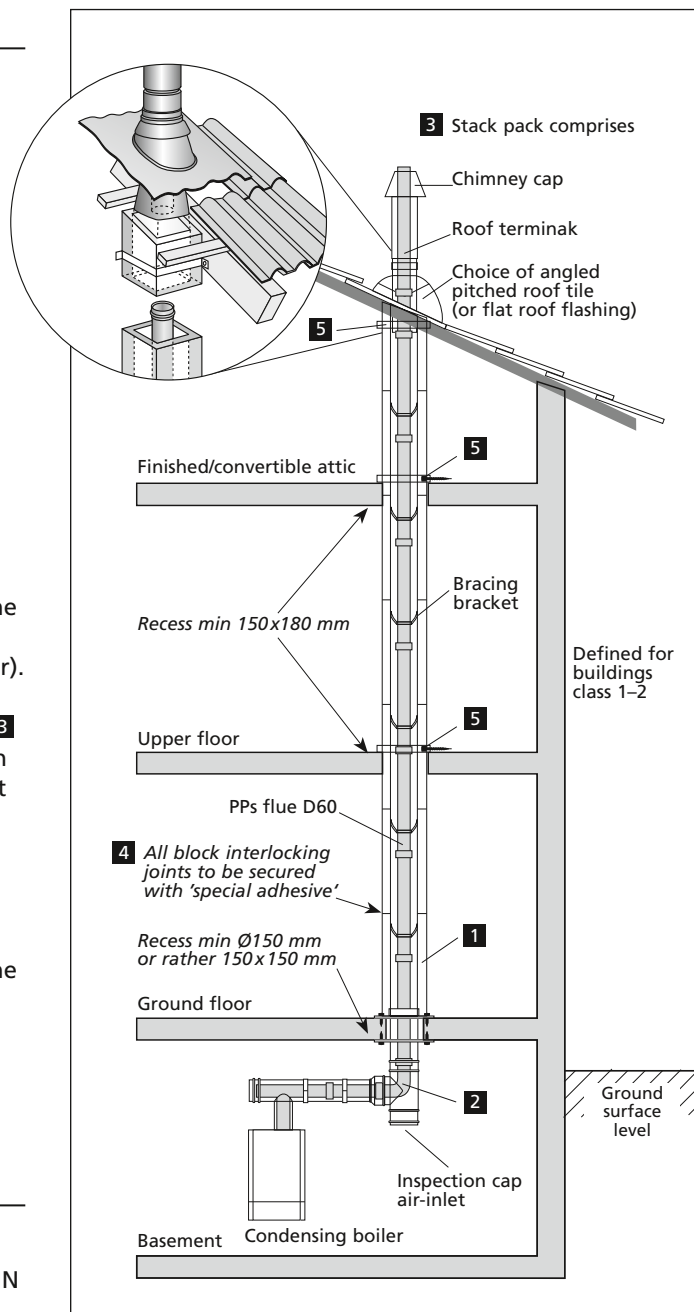
The support brackets **5** must be fixed in position in the area above the ceiling openings (except in the first ceiling above the heating appliance) and to the roof rafters at the uppermost position.

The number of support brackets required corresponds to the number of floors above the heating appliance.

Delivery conditions

The prices are given per unit exclusive of local value-added tax and delivery costs. Non-exchanged EURO DIN pallets will be calculated at 13 EUR. We will deliver to an accessible unloading point. Unloading is not included. The customer must assume responsibility for unloading the goods.

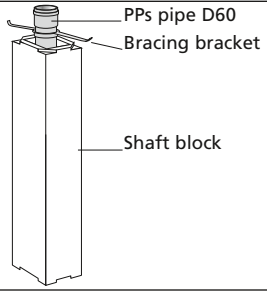
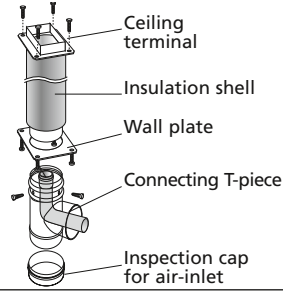
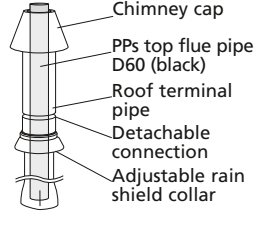





Latest revision: January 2021 (Subject to technical changes)



SKOBIFIX[®] nano 30 – Prefab chimney shaft (Outer dimension: 130x160 mm) for condensing technology, defined for buildings class 1–2 (Single family dwellings, fire-resistance class F30)

Order/enquiry form 2021

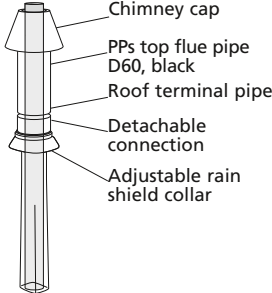
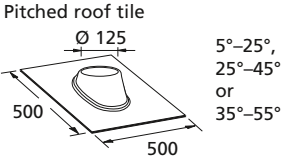



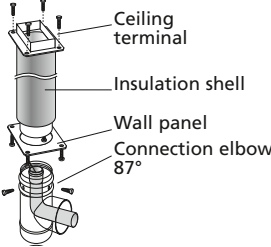
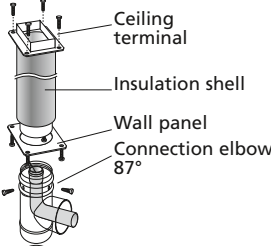
Buyer (Name/Company)	Order number
Customer ID	Commission no.
<input type="checkbox"/> Enquiry <input type="checkbox"/> Order	Delivery address
Delivery date	

Article spec./description	Item-no.	Amount	EUR/unit	
1 Shaft blocks: Shaft block 1,000 mm incorporating PPs flue D60, bracing brackets (40 x Shaft blocks/pallet, – standard Euro DIN pallet)	731000			 <p>PPs pipe D60 Bracing bracket Shaft block</p>
2 Ceiling connection adapter, T piece and air-inlet inspection cap; adapter dimensions 60/100, white powder coated (RAL 9010)	731003			 <p>Ceiling terminal Insulation shell Wall plate Connecting T-piece Inspection cap for air-inlet</p>
Connection adaptor D80/125–60/100 sym.	731033			
3 Stack packs: Stack pack with roof terminal 0.4 m, pitched roof tile 25–45°, 600x700 mm, black	731006			 <p>Chimney cap PPs top flue pipe D60 (black) Roof terminal pipe Detachable connection Adjustable rain shield collar</p> <p style="text-align: center;">or</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Pitched roof tile 25–45° </div> <div style="text-align: center;">  Flat flashing </div> </div>
ditto in terracotta	731007			
Stack pack with roof terminal 1.0 m, pitched roof tile 25–45°, 600x700 mm, black	731008			
ditto in terracotta	731009			
Stack pack with roof terminal 0.4 m, flat flashing, black	731010			
Stack pack with roof terminal 1.0 m, flat flashing, black	731011			
4 SKOBIFIX special adhesive 3 kg tub	710007			
5 Support bracket, (2-piece)	731004			
Support bracket adjustable	731050			
SKOBIFIX builder's saw	710069			
Connecting support for cut bricks	731005			
Sum				
Freight cost				
Total				

SKOBIFIX[®] 30

Prefab chimney shaft (Outer dimension: 130x160 mm) for condensing technology, defined for buildings class 1-2 (Single family dwellings, fire-resistance class F30)

Order/enquiry form 2021

Article spec./ description	Item-no.	Amount	EUR/unit	
1 Stack pack with roof terminal 0.4 m, pitched roof tile 5-25°, 500x500 mm, black	731014			
ditto in terracotta	731015			
Stack pack with roof terminal 1.0 m, pitched roof tile 5-25°, 500x500 mm, black	731016			
ditto in terracotta	731017			
Stack pack with roof terminal 0.4 m, pitched roof tile 35-55°, 500x500 mm, black	731018			
ditto in terracotta	731019			
Stack pack with roof terminal 1.0 m, pitched roof tile 35-55°, 500x500 mm, black	731020			
ditto in terracotta	731021			
2 Roof terminal, painted silver, 0.4 m	731012			
Roof terminal, painted silver, 1.0 m	731013			
3 Pitched roof tile, DN 125, 5-25°, black	710095			
Pitched roof tile, DN 125, 25-45°, black	710099			
Pitched roof tile, DN 125, 35-55°, black	710097			
4 Flat roof collar D125	000251			
5 Roof terminal extension, 500 mm, black	731027			
ditto in terracotta	731028			
ditto in painted silver	731029			
Roof terminal extension, 1000 mm, black	731030			
ditto in terracotta	731031			
ditto in painted silver	731032			
6 Tensioning clamp for roof terminal extension D135, black, with 15m rope and 3 rope tensioners	710158			
ditto in terracotta	710159			
ditto in galvanized	710160			
7 Ceiling connection adapter with connecting elbow, 87°, D60/100, powder-coated, white	731038			
	Sum			
	Freight cost			
	Total			

Latest revision: January 2021, Subject to technical changes. Art.-Nr. 791050_WEB EN